
输入/输出端子台

コネクタ端子台（入力用・出力用）
bit input/output terminal block



T087

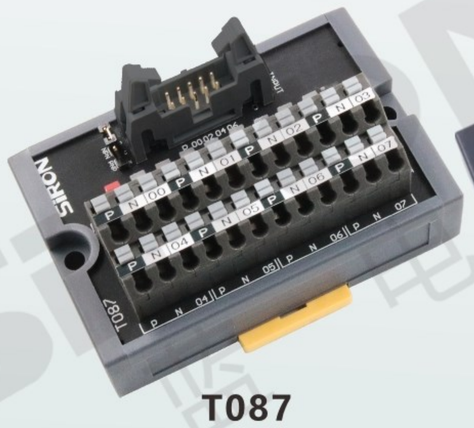

T088



T089-1



T211-1



T212

特点 Features

* T087/T088/T089此端子台为输入/输出通用接线端子台，对应各种终端输入/输出信号使用，方便远程控制使用；配有8组3P接口，可接2线/3线制的控制信号用；一目了然的LED动作指示灯，显示输入/输出状态；指示灯颜色对应极性为：绿色-NPN；红色-PNP；上行接线侧用10P牛角出线，方便连接到汇总的端子。
* T211/T212端子台为输入/输出通用接线端子台，对应各种终端输入/输出信号使用，方便远程控制使用；T211配有12组3P接口，可接2线/3线制的信号；T212配有16组3P接口，可接2线/3线制的信号；一目了然的LED动作指示灯，显示输入输出状态；指示灯颜色对应极性为：绿色-NPN；红色-PNP；弹片端子出线侧可选20P牛角或弹片端子。

＊T087/T088/T089 本端子台は入力/出力通用接続端子台、各なる端子の信号入力/出力に対応できる、遠隔のコントロールを便利に実施できる。8組の3Pコネクターで、2チャンネル式/3チャンネル式の制御信号に利用できる。入力/出力状態を、LED動作指示ランプで一目瞭然となる。指示ランプの極 性対応関係は「緑-NPN、赤-PNP」;上接続側は10P凸ピン出力式、取りまとめの端子台とのつながりが便利となる。
＊T211/T212端子台は入出力共通配線端子台で,各種端子に対応している入力/出力信号の使用は、リモート制御を容易にする;T211には3Pが12セット搭載されているインターフェース、2線/3線制の信号を受けることができます;T212は16群3Pインターフェースを備え、2ラインまで接続できる/3ライン制の信号;一目でわかるLEDの動作指示灯は,入出力状に表示される実態;ランプの色の対応する極性は緑色-NPN;赤-PNP;破片端副出線側は牛角または破片端子を20Pとする。

* T087/T088/T089 this terminal is an input/output general wiring terminal, rightAll kinds of terminal input/output signals should be used for convenient remote control; Eight sets of 3ps were providedInterface, can connect 2 /3 wire system control signal; Clear LED action indicationLight, display input/output status; The corresponding polarity of the indicator light color is: green-npn;Red - PNP; Uplink wiring side with 10P horn outlet, easy to connect to the terminal summary.
* T211/T212 terminals are input/output universal terminal terminals corresponding to various terminalsTerminal input/output signals are used to facilitate remote control; T211 has 12 sets of 3PsInterface, can connect 2 /3 wire system signal; The T212 is equipped with 16 sets of 3P interfaces and can connect 2 wires/3 wire signal; Clear LED action indicator light, showing input and outputState; The corresponding polarity of the indicator light color is: green-NPN; Red - PNP; The shell side20P horn or shrapnel terminal is optional on sub-outlet side.

注意事项 note

- 订购前请确认好PLC引脚定义，选择适合的端子台。
- 和PLC连接时，请务必使用本公司开发的与之对应的专用电缆线。
- Before ordering，please confirm the PLC pin definition,choose the suitable terminal.
- When PLC connection,Please be sure to use the corresponding special cable developed by our company.

适合电线 Suitable wire

1.5 mm²Following/ AWG16；
剥线长度：6mm



选型参考 Type selection reference

型号 Model	T087/T088	T089-1	T211-1	T212
名称 Name	8位输入/输出端子台	8位输入/输出端子台	12位输入/输出端子台	16位输入/输出端子台
输入极性	NPN/PNP双极性			
输入结构	10P MIL插头	单层弹片式端子台	弹片式端子	弹片式端子
输出结构	双层弹片式端子台			

适用PLC Suitable PLC

Panasonic	FP0-C16T/C16CT(IN) FP0-C16P/C16CP(IN) FP0-C32T/C32CT/T32CT(IN) FP0-C32P/C32CP/T32CP(IN) FP0-E16T/P(IN) FP0-E32T/P(IN) FP0-E8X FP0-E16X Fp -C28(IN) Fp -C32(IN)	
不限品牌		不限PLC

关联产品 Related products

适用电缆 Suitable cable	X216-1 X222-1 X221-1 X221-2 X222-3 X223-1 X227-1 X225-1 X225-2	X210 X21 X22
	（详情请参阅本目录缆线系列）For details, please refer to the directory cable series	

规格参数 Specifications

输入 Input	额定电流 Nominal operating current	1A
	额定电压 Nominal coil voltage	DC24V
输出侧对应 Corresponding output Devices		Photoelectric Switch, Button Switch, Fiber

专利 CE RoHS EU指令 省空间 PLC

T088专利号：202130450389.0
T212专利号：202130450809.5
T087-TG专利号：202130450766.0
T089-1G专利号：202130450763.7
T211-1G专利号：202130450404.1

有关符合EU指令的产品请参阅附-35

询问胜蓝
0755-8886 0059
当日出货

防护罩定制款 The protective cover is customized



T087-TG


T089-1G



T211-1G

外形图 Dimensions


T087

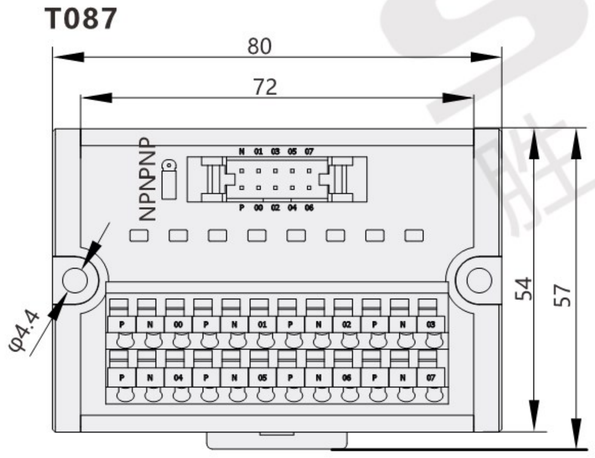


T088

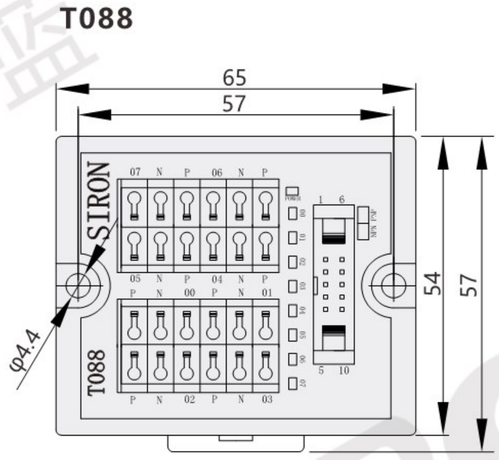


T089-1

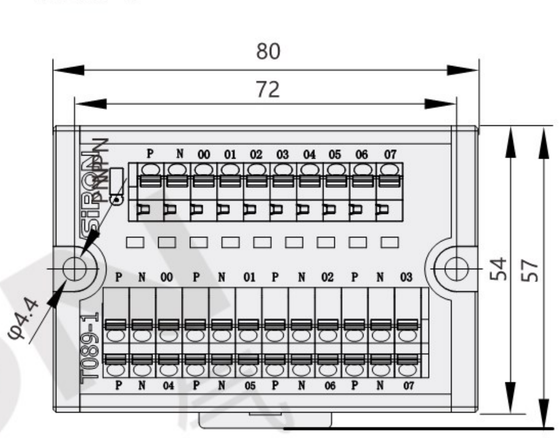

T211-1

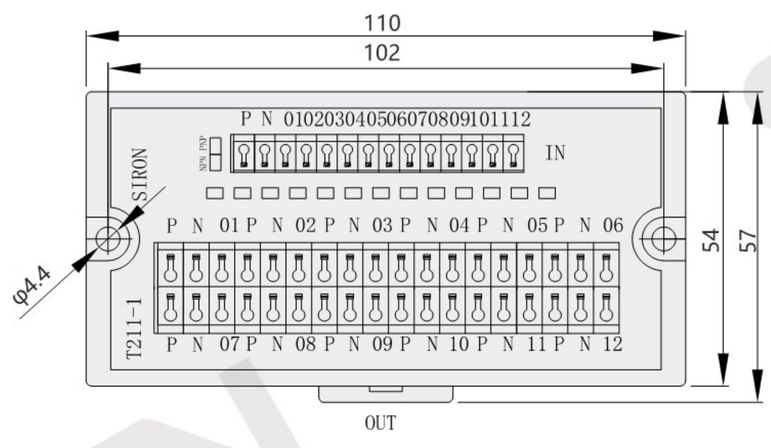

T212

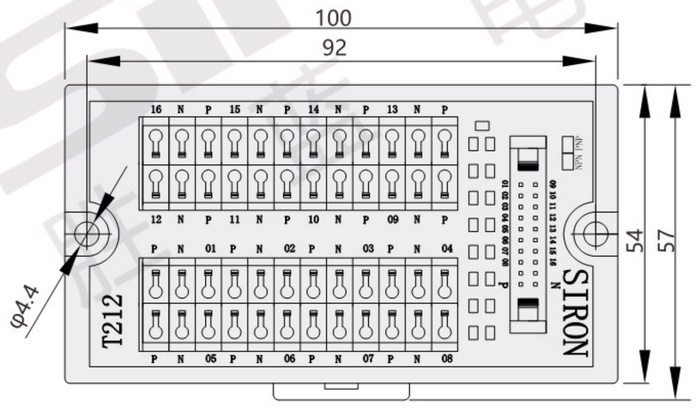


注意： note


- 用2个M4的螺丝可固定在零件安装的地方。建议使用M4X16的螺丝， 螺纹孔深3mm以上。
- 可安装在标准35mm的DIN导轨上
- Screw Mounting:use M4*16 screw,screw hole depth≥3mm.
- DIN Rail Mounting:Standard 35mm DIN RAIL.

配线图 Wiring Diagram


T087/T088

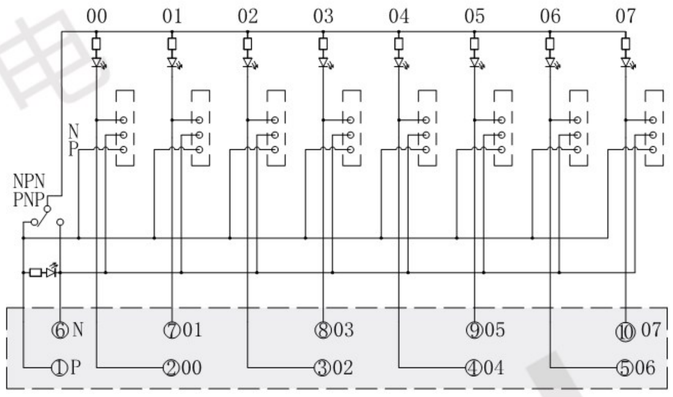

T089-1

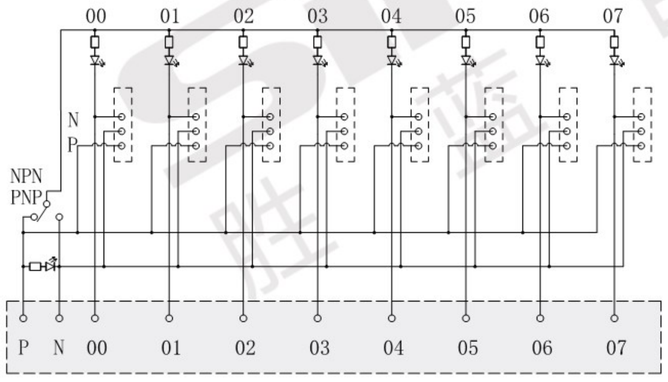

T211-1

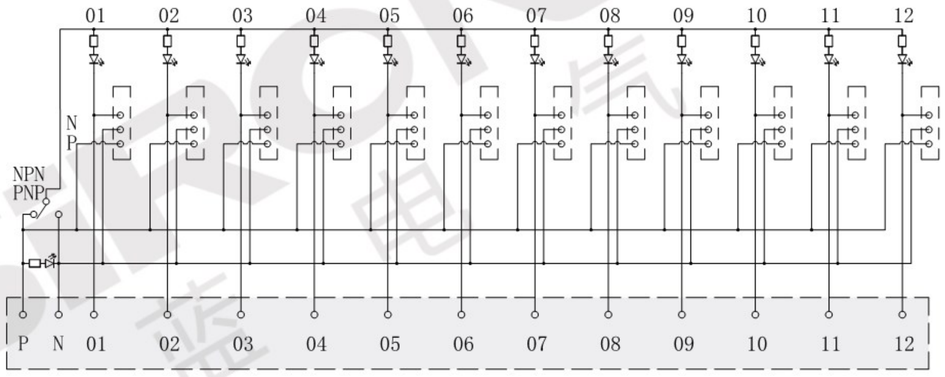

T212

